


Snyder Advantage plate specifications

Plate sz.	Suggested boot size	Axle distance*		Overall length	
		Standard		Metric	
3	3	5	8	127.00	203.20
4	3 1/2, 4	5 1/4	8 1/4	130.50	209.55
5	4 1/2	5 1/2	8 1/2	139.70	215.90
6	5	5 3/4	8 3/4	146.05	222.25
7	5 1/2, 6	6	9	152.40	228.60
8	6 1/2, 7	6 1/4	9 1/4	158.75	234.95
9	7 1/2	6 1/2	9 1/2	165.10	241.30
10	8, 8 1/2	6 3/4	9 3/4	171.45	247.65
11	9, 9 1/2	7	10	177.80	254.00
12	10, 10 1/2	7 1/4	10 1/4	184.15	260.35
13	11	7 1/2	10 1/2	190.50	266.70
14	11 1/2	7 3/4	10 3/4	196.85	273.05
15	12	8	11	203.20	279.40
16	12 1/2 +	8 1/4	11 1/4	209.55	285.75

* Axle distance is from center of axle to center of axle

A. Height from base of plate to top of kingpin - 2 3/4 inches - 69.85 mm

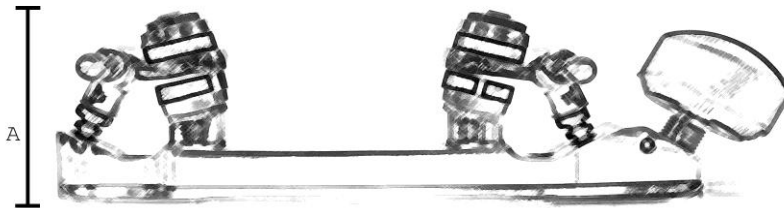

B. Width of front - 2 1/3 inches - 58.42 mm

B1. Width of mounting holes - 1 3/4 inches - 44.45 mm

C. Width of back - 1 3/4 inches - 44.45 mm

C1. Width of mounting holes - 1 1/4 inches - 31.75 mm

